



BROWNSVILLE NAVIGATION DISTRICT BULK CARGO DOCK IMPROVEMENTS

PRE-BID CONFERENCE



BROWNSVILLE NAVIGATION DISTRICT

-PORT OF BROWNSVILLE



Google Earth
© 2018 Google
Data SIO, NOAA, U.S. Navy, NGA, GEBCO
© 2018 NECI


Bulk Cargo Dock - Port of Brownsville

3 mi



BROWNSVILLE NAVIGATION DISTRICT

-PORT OF BROWNSVILLE

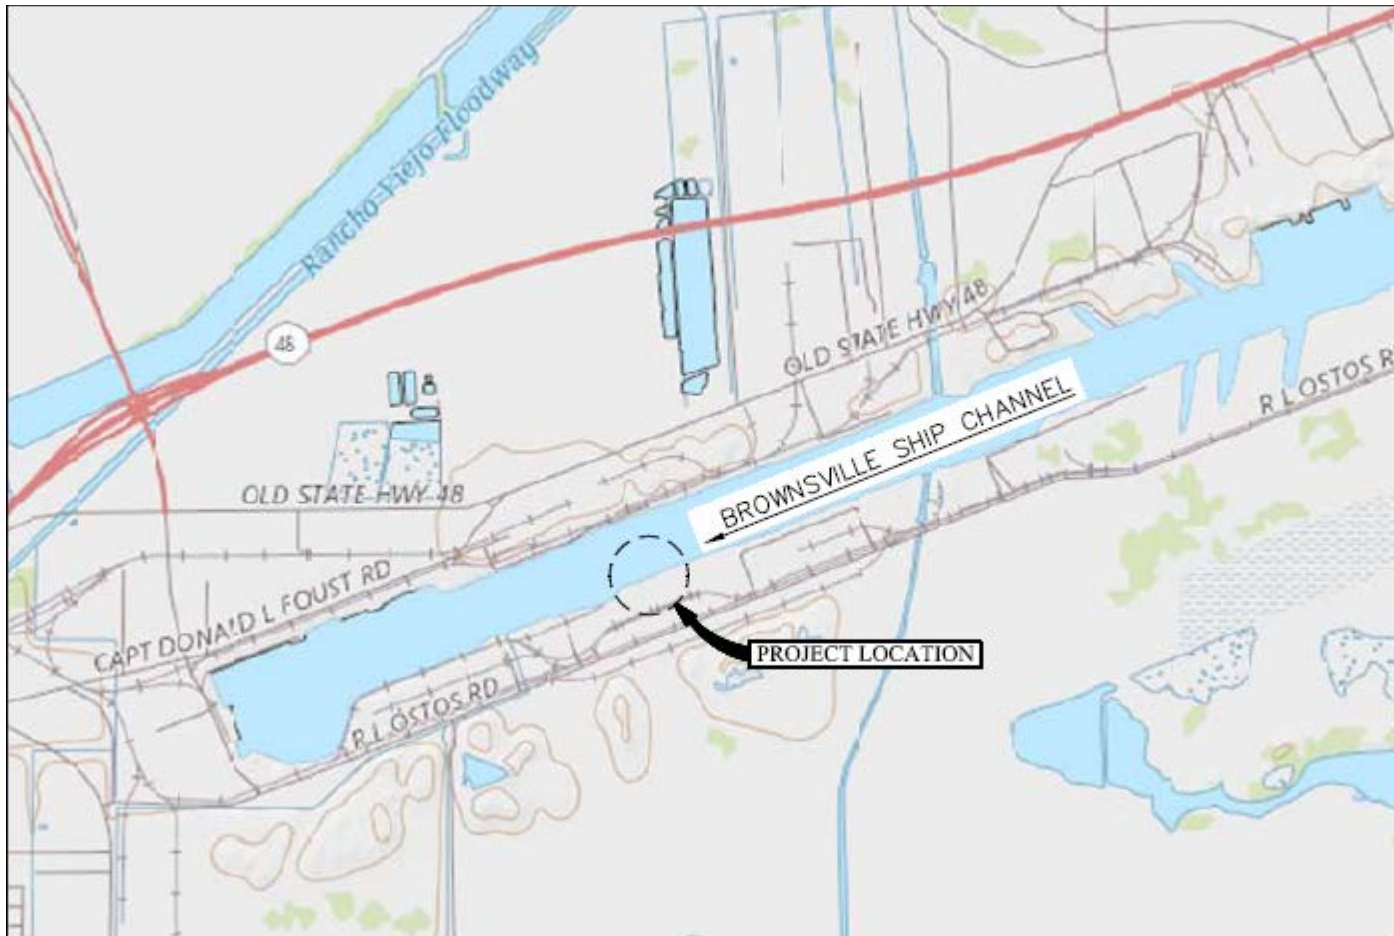

PORT OF BROWNSVILLE PROJECT SITE



DOCK REHAB & IMPROVEMENTS


SUMMARY OF SCOPE



Dock Rehab & Improvements


- Demo
 - 400 LF of continuous timber fender piles
- Rehabilitation
 - Repair of (20) dock piles at west end of dock
 - Fiberglass Reinforcement of (37) piles at front row of dock, below water line
 - Repair existing dock bollard support concrete
- Improvements
 - Install Ship Loader concrete pads and support piling - (26) 30" diameter Steel pipe piles
 - Install (13) Ship & Barge fender systems for 650 ft Vessel Berthing and Mooring
 - Independent of bulk cargo dock
 - Dual 42" diameter vertical Steel pipe piles at each fender system
 - Fender Panels - UHMW face and rubber cells for energy absorption
 - Install (4) Landside Ship Moorings
 - Steel mooring bollards
 - Concrete pile caps
 - Timber pile groups

DOCK REHAB & IMPROVEMENTS GENERAL SITE PLAN – SCOPE OF WORK

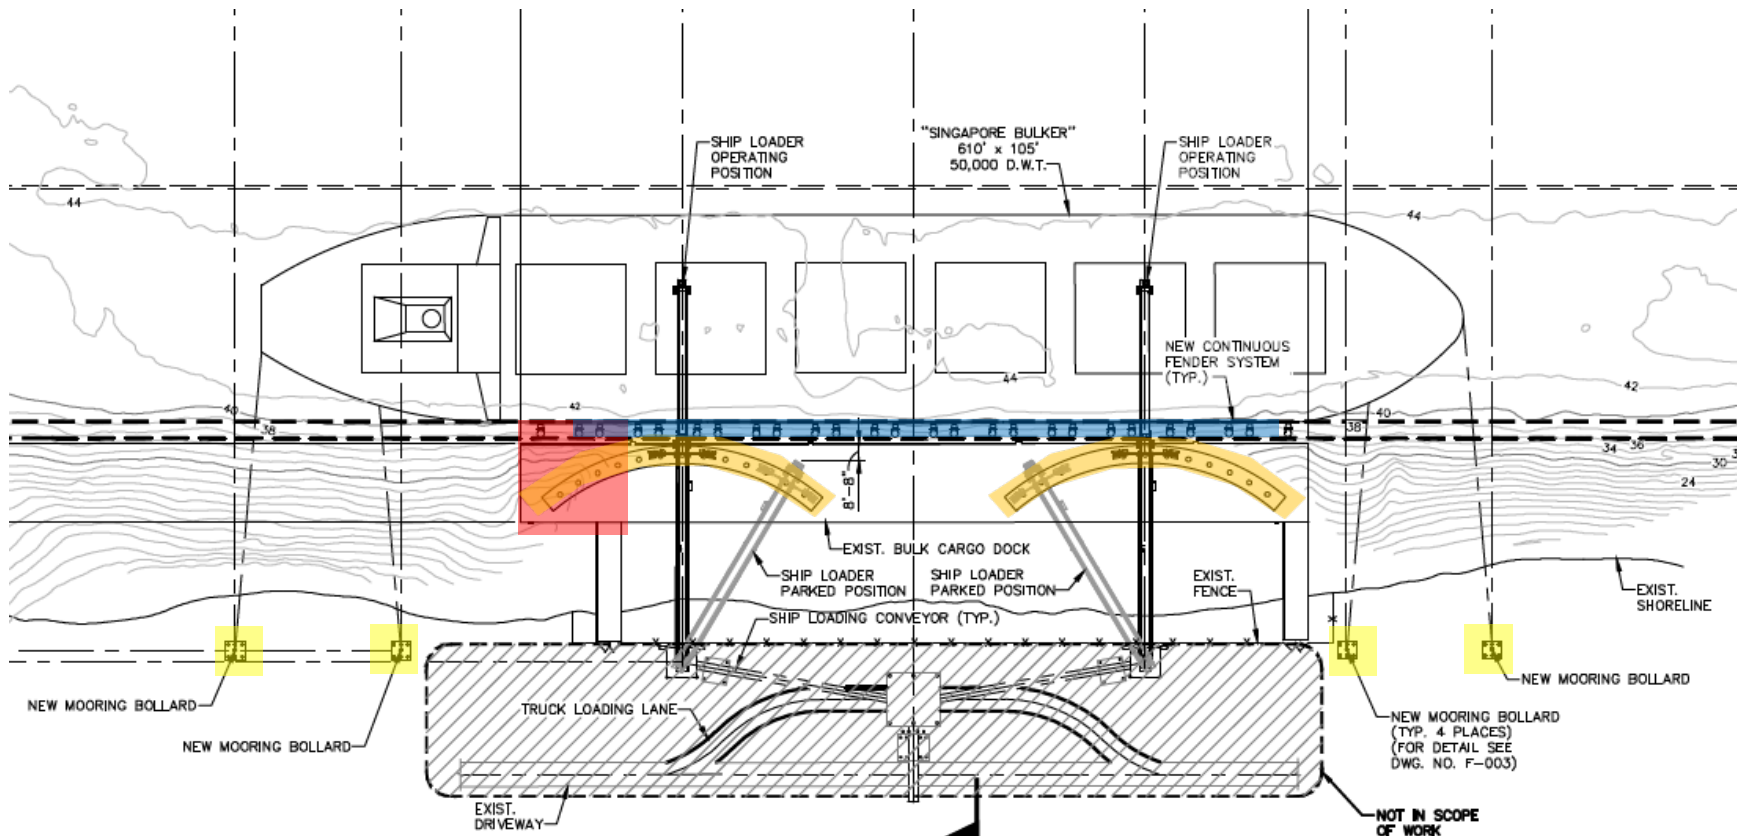

BULK CARGO DOCK AND NO. 5 DOCK SITE PLAN
SCALE: 1"=50'-0"

GRAIN EXPORT – SHIP LOADING

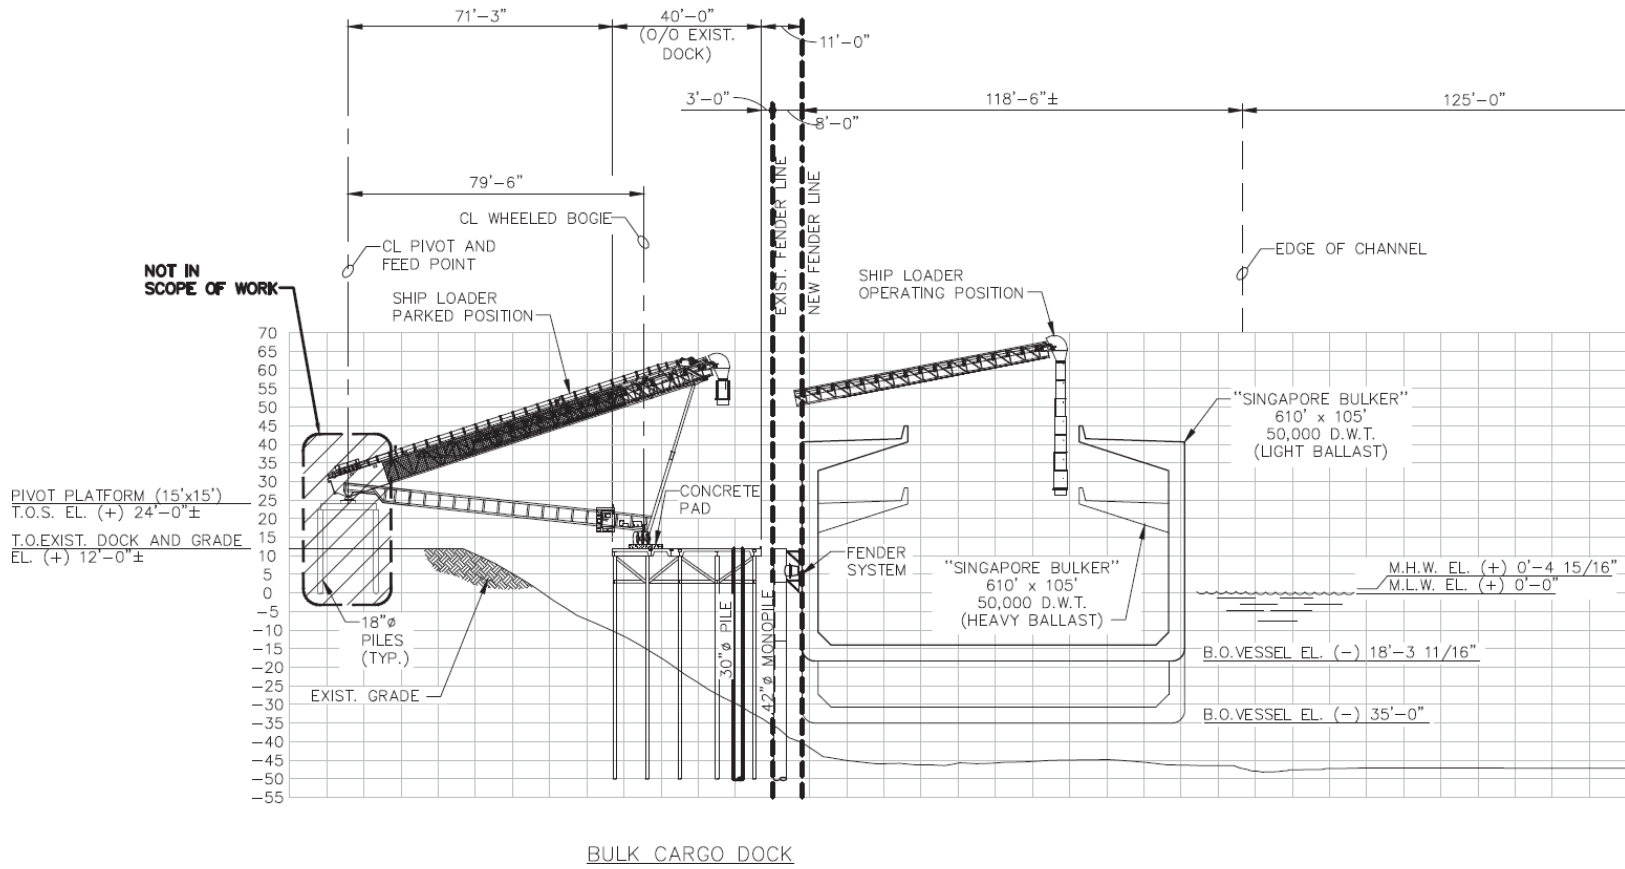



EXISTING CONDITIONS





03/23/2017



06/20/2016



06/20/2016



06/20/2016



06/20/2016





06/20/2016

BID INFORMATION



- **Deadline for Bidder's Questions - May 18, 2018**
 - All questions are to be submitted in writing.
- **Bid Opening – May 30, 2018 @ 3:00PM CST**
 - BND Commend Center, 2993 N. Indiana Ave., Suite “B”, Brownsville TX 78521
- **Bids will be calculated on unit price basis**
- **BND Board of Commissioners reserves the right to reject any and all bids, and to select bid deemed most advantageous to the BND**
- **Notice of Award - 6/21/18 (projected)**
- **Notice to Proceed - 7/5/18 (projected 10 days from notice of award to complete and return paperwork)**
- **Project completion date - 2/21/19 (231 days or 33 weeks)**

CONTACT INFORMATION



- **Ariel Chavez - ACHavez@portofbrownsville.com**
- **Scott White - dswhite@edg.net**